


# Beta 16

2 Cylinders - 599cc - 16bhp max at 3,600 rev/min - 95Kg


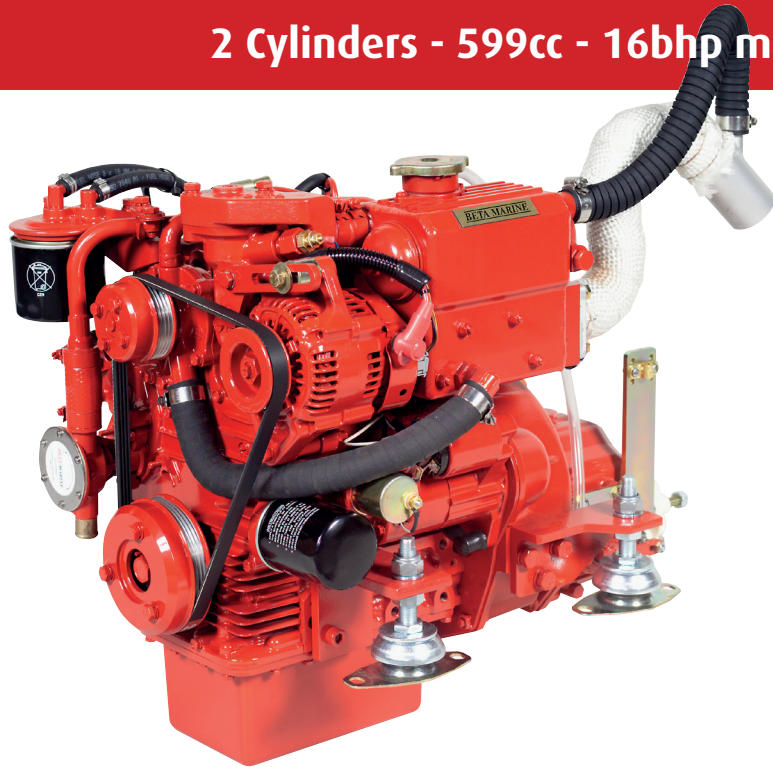


Engine shown with optional high rise exhaust

## Standard Specification

Beta Marine - Beta 16 - 2 cylinder, naturally aspirated, diesel propulsion engine developing 16 bhp at 3,600 rpm with a swept volume of 599 cc (Recreational Craft Directive emission compliant). The engine is supplied complete with a heat exchanger and header tank, water cooled exhaust manifold, fresh and sea water pumps, cast injection bend, mechanical fuel lift pump, fuel and oil filters, flywheel with heavy inertia ring for super smooth running at low rpm, flywheel housing, special quiet air intake filter, 12 volt starter, 40 amp battery charging alternator, shutdown solenoid, control panel "ABV" (with tachometer/hour recorder, keystart switch and push button stop, warning lights and alarm buzzer for low oil pressure, high water temperature, no charge, and power on); a 3m interconnection cable with multi pin plug and socket to engine harness. Gearbox with nominal 2:1 reduction, heavy duty engine feet with flexible mountings, "Morse" type end fittings for speed and gear control, engine test certificate, operators manual. Red paint and packed on skid base with a 5 year "Self Service" warranty.

## Standard 'ABV' Contol Panel

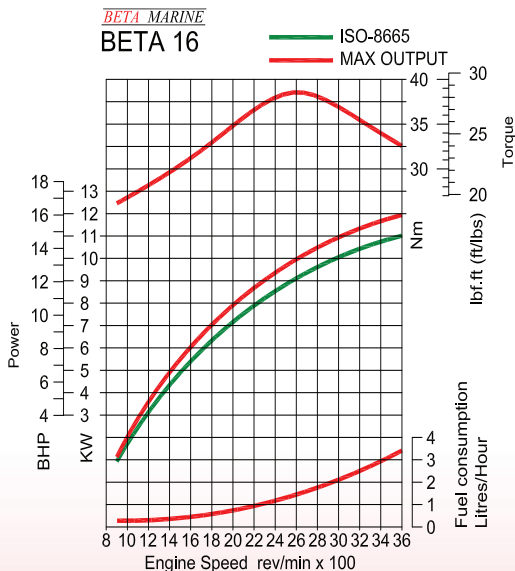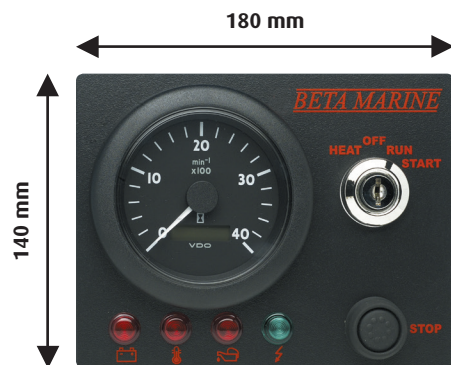

Fuel consumption based on theoretical propeller loading - matched at full speed

## Standard Features

- Reliable heat exchanger cooled, naturally aspirated, indirect injection diesel engine, based upon Kubota's highly advanced technology.
- Cast iron cylinder head and block with a gear driven camshaft and sea water pump.
- Three vortex combustion system for quiet running, excellent fuel consumption, and emission compliance in all countries.
- Installation angles up to 15° maximum when static, and 25° when heeling.
- Technodrive or PRM gearboxes. Output rotation is clockwise in ahead viewed from gearbox end.

## Optional Extras

- Special engine feet to suit your installation requirements.
- Shallow sump.
- 12 Volt - 70 Amp alternator available.
- Keel cooling.
- Control Panels ABV, ABVW, B or C with gauges and alarms.
- See price list for a comprehensive range of accessories to cover a complete engine installation.

**BETA MARINE**

CANADA, QC.  
SOLUTION DIESEL - 514 268-7788  
Pierre-Valéry Boissé  
info@solutiondiesel.ca